


SoCal Diesel®

2017-2019 L5P Alternative Firing Order Wiring Instructions

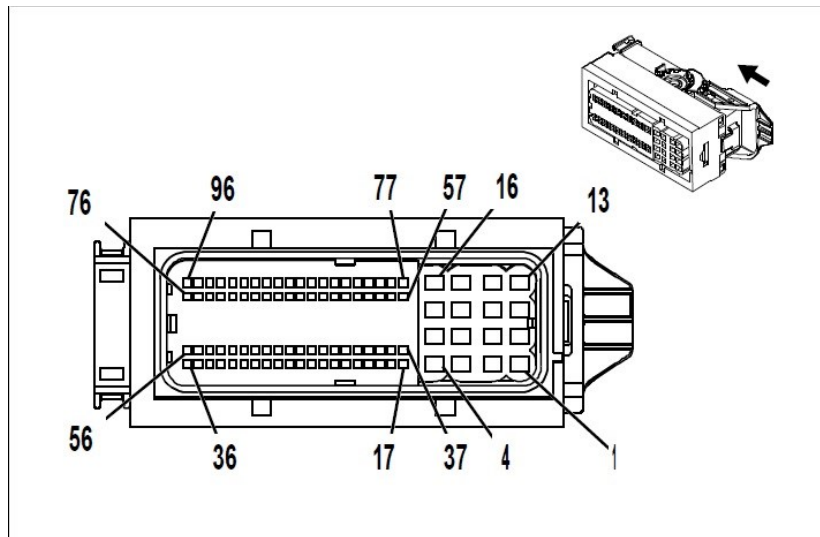

For use only with SoCal Diesel® Alternative Firing Order Camshafts
96 Pin Black Connector K20 Engine Control Module X2.
Number designations can also be found on the back of the connector.

Swap the following wires:

Swap: Pin 1 (VT/GN) with Pin 2 (YE/GY)

Swap: Pin 13 (Green) with Pin 14 (Grey)

Swap: Pin 15 (WH/GN) with Pin 16 (BU)

*Disclaimer: There is no warranty expressed or implied.
User assumes all liability for use of this information.

SoCal Diesel®
24832 Avenue Rockefeller
Valencia, CA 91355
661-775-5620
www.socaldiesel.com