
SoCal Diesel® 2020 L5P Alternative Firing Order Wiring Instructions

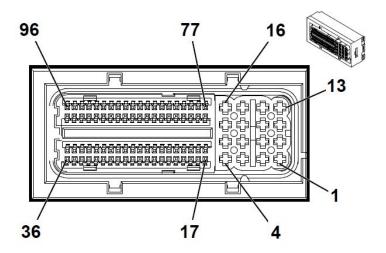

For use only with SoCal Diesel® Alternative Firing Order Camshafts **96 Pin Black Connector K20 Engine Control Module X2**. Number designations can also be found on the back of the connector.

Swap the following wires:

Swap: Pin 1 (VT/GN with Pin 2 (YE/GY)

Swap: Pin 13 (Green) with Pin 14 (Grey)

Swap: Pin 15 (WH/GN) with Pin 16 (BU)

*Disclaimer: There is no warranty expressed or implied.

User assumes all liability for use of this information.

SoCal Diesel® 24832 Avenue Rockefeller Valencia, CA 91355 661-775-5620 www.socaldiesel.com