



# DURAMAX OIL PRESSURE TESTER


Part # 800-OPT

## User Manual



## INSTRUCTIONS

1. Run engine until normal operating temperature is reached, then shut it off.
2. Connect adapter number 11, 12, or 13 to the engine block at the factory sensor locations or the front cover bypass plug.
3. Connect the hose and gauge to the adapter using the black quick connectors 1-10
4. Start the engine and follow the vehicle manufacturer's testing procedures.
5. Make a note of the reading and shut the engine off. Compare results with readings given by the vehicle's manufacturer.

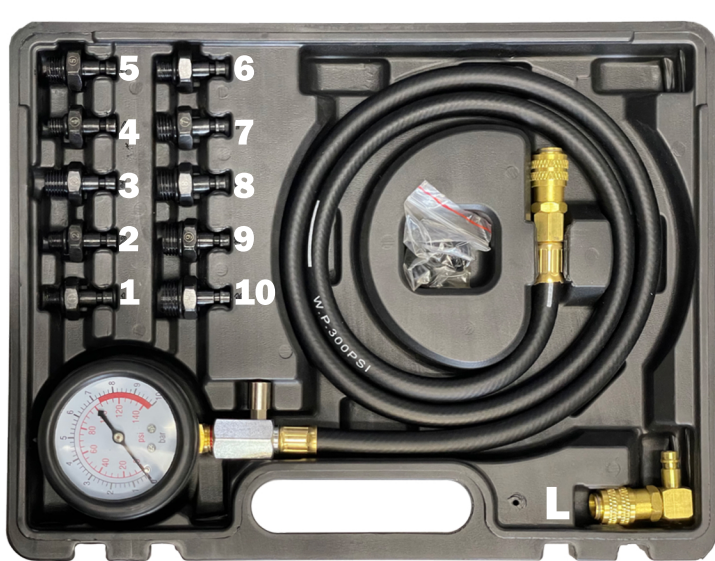

Adapter	Thread
1	R 1/8 DIN 2999
2	1/8" x 27 NPT
3	1/4" x 18 NPT
4	3/8" x 20 UNF
5	1/2" x 20 UNF
6	M10
7	M12
8	M14
9	M16
10	M18
11	<b>DHD 007-1100</b> Oil Pressure Sensor Adapter (2011+ Blocks)
12	<b>DHD 007-1700</b> Oil Pressure Sensor Adapter (*01-'10 Blocks)
13	<b>Oil Bypass Plug</b> @ Front Cover
L	<b>90° ELBOW</b>